

PRODUCT CATALOG





ABOUT US

Sinar Global Hygiene (SGH) was incorporated with the goal to be leaders in better hygiene solutions that are environmentally sustainable. With over 20 years of experience, we have become a well-established name within the industry servicing countless customers. Regardless of the nature of environment or requirement to be fulfilled, our customers can be rest assured that our sustainable hygiene methods cover all aspects of system cleaning practices and standard compliance.

At Sinar Global Hygiene, we offer a range of specialized services and solutions to cater to the demand of the robust and ever evolving cleaning industry through the supply of eco certified cleaning chemicals, high grade cleaning machineries and relevant related consumables.

Our dedication to provide honest, reliable and efficient hygiene services is strengthened by our commitment and investment in the latest equipment and environmentally friendly technology available in the market today.

All our employees are carefully selected and undergo specialized training before becoming certified technicians. As part of our business expansion plans, in 2018 the company introduced specialized services which extended to Nano Coating Technology, Certified Indoor Air Quality Control Services, Pest Control Services, Professional Cleaning Of Commercial Kitchen Hoods & Ducts, Dry Carpet Cleaning Technologies and Deep Hygiene Cleaning For Sanitization and Decontamination of commercial and domestic buildings alike. Let us be your trusted environmental hygiene specialists for a better tomorrow

VISION

To lead the way in specialized hygiene servicing. We take pride in our core values that honour and serve our customers. Our vision is to provide a wide range of specialized services and solutions that can not only meet but exceed the expectation of our customers to support the current hygiene requirement alongside the diversity of our nation's infrastructural needs.

MISSION

- Provide innovative solutions for our clients that extend beyond traditional boundaries through quality products and services for performance and reliability
- Prioritize our employees by developing all our employees to achieve their full potential through providing an efficient, safe and satisfying work environment
- To comply with Ecological Objectives while delivering impeccable service

PRODUCT & SERVICES



Hygiene Cleaning Services



Environmentally Friendly Chemical



Sustainable System & Method



Technologically Advanced Machine



Effective Nano Technology



Stringent Contamination Control Situations


ENVIRONMENT HYGIENE CONTROL SYSTEM



Nano Coating



Dycem Mat



Indoor Air Quality



Specialised Cleaning



Duct Cleaning



Steam Cleaning



Cleaning Chemicals & Machines



Changing The Way You Think About Cleaning





I-MOP LITE

2 Year Warranty

The imop Lite is lighter than the i-mop XL, making itthe smallest and lightest machine available in the i-mop range. By expanding its current range of i-mops, i-team is offering a tool with outstanding maneuverability and portability, making it perfect for mobile cleaning.

The imop Lite can go in even smaller spaces than its bigger brother, the i-mop XL. From the improved control panel to the new water overflow protection mechanism, everything is designed to make it even more user friendly.











SAFER BETTER FOR EVERYONE

Technical Specifications Application indoor, hard surfaces Theoretical performance 1400 m² per hour Practical performance 700-1000m² per hour Brush speed 500 rpm Brush pressure 13 kg Operation width 37 cm Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 14: 90-100 minutes i-power 14: 90-100 minutes Charger type Off board* Charger			
Theoretical performance Practical performance 700-1000m²per hour 8rush speed 500 rpm Brush pressure 13 kg Operation width 37 cm Size machine (L x W x H) Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Technical Specifications		
Practical performance 700-1000m² per hour Brush speed 500 rpm Brush pressure 13 kg Operation width 37 cm Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Application	indoor, hard surfaces	
Brush speed 500 rpm Brush pressure 13 kg Operation width 37 cm Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Theoretical performance	1400 m²per hour	
Brush pressure 13 kg Operation width 37 cm Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5 kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Practical performance	700-1000m²per hour	
Operation width 37 cm Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Brush speed	500 rpm	
Size machine (L x W x H) 34 X 43 X 120 cm Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Brush pressure	13 kg	
Weight without battery & water 11.5kg Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* i-power 9: 24 V, 8.8Ah i-power 14:25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14:90-100 minutes Charger type Off board*	Operation width	37 cm	
Clean water tank 4 L Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Size machine (L x W x H)	34 X 43 X 120 cm	
Recovery tank 5 L Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* i-power 9: 24 V, 8.8Ah i-power 14:25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Off board*	Weight without battery & water	11.5kg	
Material PP, Aluminum alloy Power-source 2 i-power 9 batteries or i-power 14* Battery spec i-power 9: 24 V, 8.8Ah i-power 14:25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Off board*	Clean water tank	4 L	
Power-source 2 i-power 9 batteries or i-power 14* i-power 9: 24 V, 8.8Ah i-power 14: 25.2 V, 14 Ah Run time i-power 9: 60-70 minutes i-power 14: 90-100 minutes Charger type Off board*	Recovery tank	5 L	
i-power 9 : 24 V, 8.8Ah i-power 14 :25.2 V, 14 Ah Run time i-power 9 : 60-70 minutes i-power 14 : 90-100 minutes Charger type Off board*	Material	PP, Aluminum alloy	
i-power 14:25.2 V, 14 Ah Run time i-power 9:60-70 minutes i-power 14:90-100 minutes Charger type Off board*	Power-source	2 i-power 9 batteries or i-power 14*	
i-power 14 : 90-100 minutes Charger type Off board*	Battery spec		
	Run time		
Charger 110-240 V, 50/60 Hz	Charger type	Off board*	
	Charger	110-240 V, 50/60 Hz	

^{*}Batteries & charger can be ordered seperately



I-MOP XL 2 Year Warranty

The i-mop XL represents an opportunity for you to dramatically improve your cleaning and maintenance operations while saving you time and money.

As a heavy duty auto scrubber, the i-mop will clean floors faster, easier and with better results than you can achieve with traditional wet-mopping. With a 46cm scrub deck the i-mop XL can be used for small to medium spaces.











Technical Specifications		
Application	indoor, hard surfaces only	
Theoretical performance	Up to 1800 m pểr hour	
Practical performance	1000-1300 m pe ² hour	
Brush speed	350 rpm	
Brush pressure	22.5 kg	
Operation width	46 cm	
Size machine (L x W x H)	47.5 X 44 X 120 cm	
Weight without battery & water	18.5 kg	
Clean water tank	4 L	
Recovery tank	5 L	
Material	PP, Aluminum alloy	
Power-source	2 i-power 9 batteries or i-power 14*	
Battery spec	i-power 9 : 24 V, 8.8Ah i-power 14 :25.2 V, 14 Ah	
Run time	i-power 9 : 60-70 minutes i-power 14 : 90-100 minutes	
Charger type	Off board*	
Charger	110-240 V, 50/60 Hz	

^{*}Batteries & charger can be ordered seperately



I-MOP XXL 2 Year Warranty

The i-mop is lightweight, easy to maneuver and will cover much more floor area than traditional wet-mopping in the same amount of time. The i-mop XXL allows the user to clean up to 2300m² in just an hour, flipping the script on how a larger auto scrubber should look, feel & handle.

You can approximately save 20% of your time compared to a conventional walk-behind auto scrubber with a floor size of 50 to 75cm by operating the i-mop XXL.











Techni	C	THE 1	
	ज्या भारत	HII(H:	
		4111	

reenmear openmeations		
Application	indoor, hard surfaces only	
Theoretical performance	Up to 2300 m per hour	
Practical performance	1200-1800 m pe² hour	
Brush speed	350 rpm	
Brush pressure	32 kg	
Operation width	62 cm	
Size machine (L x W x H)	64.5 X 47 X 120 cm	
Weight without battery & water	21 kg	
Clean water tank	5 L	
Recovery tank	6 L	
Material	PP, Aluminum alloy	
Power-source	2 i-power 14 batteries*	
Battery spec	i-power 9 : 24 V, 8.8Ah i-power 14 :25.2 V, 14 Ah	
Run time	i-power 9 : 50-60 minutes i-power 14 : 60-70 minutes	
Charger type	Off board*	
Charger	110-240 V, 50/60 Hz	

^{*}Batteries & charger can be ordered seperately



Automatic power shut-off when parked prevented battery drainage

With i-mop Plus, raising the scrub deck into the Park position (during the workday or when the i-mop is stored overnight) will automatically shut off the battery to prevent its drainage and optimize battery life. Lower the deck to working position and the battery automatically switches back on



Say goodbye to splashing with automatic brush shut-off

With the new automatic battery shutoff, brushes stop rotating when the unit is put in upright (parked) position to wheel from one place to another. This prevent splashing againts people walking by and undoing your cleaning . And even when i-mop is in working mode, splash guards on both sides of the deck prevent water from spreading



Timer display

The i-mop Plus comes with additional features which makes it ideal for leasing contracts. The Plus and Pro version both have a sensor and timer integrated into the control panel. The timer displays shows how many running ours the i-mop has made in its lifespan. The timer can be used for leasing and maintenance purposes. You not know exactly when the i-mops needs maintenance or how many hours can be changed for using the i-mop

New control panel that's easier and more durable

All new i-mop include a re-designed control panel featuring a lower inlay and a bumper which prevent damage to the sides and make the machine easier to work with





Now also clean facilities at swimming pools and beach areas

The i-mop Pro has a coating on the scrubber deck which protects the i-mop againts salt & chloride



Angle switch prevents flooding motor with water

Many operators have a tendency to hold the i-mop below a 32-degree angle. This can cause the motor to flood. The new electronic angle switch on i-mop Plus automatically shuts down the motor when it's not held in the right position



Overflow Safety Valve automatically closes recovery tanks & stops extraction

There's a new floating ball valve in the recovery tank filter system of all new i-mops. This new feature (a) automatically closes the tank to prevent water from overflowing and (b) immediately stops the i-mop from extracting fluids from the floor



Recovery tank sensor shuts down i-mop when tank is full

In addition the i-mop Plus range includes a new recovery tank sensor that shuts down the i-mop completely when the tank is full

i-mop brushes



Soft brush

Optional XXL: K.2.S.72.1092.70 XL: K.20.72.0092.70 Lite: K.2.S.115.1054.70



Medium brush

Standard XXL: K.2.S.72.1092.797 XL: K.2.S.72.0092.797 Lite: K.2.S.115.1054.797



Hard brush

Optional XXL: K.2.S.72.1092.1 XL: K.2.S.72.00921 Lite: K.2.S.115.1054.1



Natural hair brush

Optional XXL: K.2.S.72.1342.797 XL: K.2.S.72.0342.797 Lite: K.2.S.115.1054.592



Natural hair brush

Optional XXL: K.2.S.72.1342.797 XL: K.2.S.72.0342.797 Lite: K.2.S.115.1054.592

Squeege blades



Scrub Bracket

Heavy duty brackets designed to lift the squeegee off the ground. Designed for deep scrubbing and stripping



Standard use

Linatex Squeegee Rubbers High quality standard squeegee rubbers. Durable and Chemical Resistant

XXL: K.1.S.72.1096.2 XL: K.1.S.72.0096.2



For lights oily/greasy environments

Oil resistants Squeege Rubbers Specially designed for longer life in very oily environments

XXL: K.1.S.72.1096.3 XL: K.1.S.72.0096.3



For extreme oily/greasy environments

Primothane Squeegee Rubbers Ultimate high perfomance squeegee rubber. Highly durable. Oil & chemical resistant

K.1.S.72.0096.4



-MATT (1 Year Warranty

i-matt is an extended duration, clean-in-place walk-off mat that vastly improves floor safety and ease of cleaning. i-mop's superior cleaning performance can be applied seamlessly to the i-matt. Adding i-protect HDD with aXonnite® to your cleaning protocol gets mats even cleaner and helps prevent recontamination to make future cleaning easier and faster.











BETTER FOR EVERYONE

Technical Specifications	
Total size (w x I)	91,15 × 900 cm
Size of 1 section (w x I)	91,15 × 300 cm



Easily clened by i-Mop

i-mop's superior cleaning perfomance can be applied seamlessly to the i-matt. Your mats are cleaned in place as frequently as your floors in the same



Easily clened by i-Mop

i-mop's superior cleaning perfomance can be applied seamlessly to the i-matt. Your mats are cleaned in place as frequently as your floors in the same



EFM Absorbent Technology (Entagled Fibre Matrix)

Made up of interlocking fibres that absorb and spreaad out water so the mat dries fast and traps dirt, preventing it from being tracked around



i-protect

When used with i-mop, i-protect HDD with aXonnite gets mats cleaner and helps prevent recontamination



Roll 3 of precut sections

Each matt has a size of 91.5 cm X 3M, This makes it ideal for entrances and walkways. Can be easily trimmed to fit



New Pig's exclusive P53 Adhesive

i-matt lays flat and stays put with out any shifting or rippling. Is it time to replace the mat? Then you can pull it up easily without leaving any residue. The adhesive layer also creates a barrier to keep liquids from leaking through





i-move 4B is an ergonomic backpack vacuum cleaner that allows you to move with maximum mobility. You can carry the lightweight and cordless i-move 4B on your back. This allows you to move with maximum mobility and work efficiently.

Thanks to backpack vacuum cleaner you can cover more than twice the floorspace compared to a normal vacuum cleaner, and the ergonomical design prevents strain on your body. The i-move 4B is the ultimate opportunity to improve you cleaning operations- making it clener, faster & safer











Technical Specifications		
Carry weight	5.7 kg without battery	
Body size (I x w x h)	$24 \times 33 \times 36.6$ cm (excluding the harness)	
Hose length	140 cm	
Capacity	5L	
Diameter of tools	32 mm	
Sound level	68 dBA	
Water lift/suction	1300 mm	
Airflow	24.74 L/sec	
Application	dry only	
Power source	i-power 9 or 14	
Motor wattage	350 watt	
Battery spec i-power 9	24 V, 8.8 Ah	
Battery spec i-power 14	25.2 V, 14 Ah	
Runtime i-power 9	40 min	
Runtime i-power 14	50 min	
Charger type	External Charger	
Material machine	РР	

The filtration on this machine is upgradeable from standard, to HEPA, to ULPA. Available in private label for our customers in 20 and 100 batches. Customize your machinery with your own names and logo's to project your company / industry image.



Activated by i-power

i-power batteries are interchangeable for all our battery powered machines, and can be switched out in seconds. We offer two battery types: i-power 9 or i-power 14. Depending on runtime you can mix & match your sources



Travel light

The cordless i-move 4B with its lightweight backpack, gives you more freedom of movement especially in confined areas. You don't have to worry about difficult terrain with bumps, steps, or other obstacles



Be comfortable

The mesh backing helps you stay comfortable and cool during operation. The wide shoulder straps in combination with the chest straps provide for maximum flexibility. The unique carrying system of the 'i-move 4B', ensures ultimate comfort during lengthy working time



You're in control

Easily switch the machine on and off by clicking the remote control power switch on your belt



Improve air quality

Upgrade the standard filter to a HEPA or ULPA filter when operating in a controlled environment





STEAM & VAC PRO

M4011 (

1 Year Warranty



The Steam & Vac Pro is the ultimate infection control tool combining sanitizing dry steam and a vacuum cleaner in one! It might be hard to believe that clean cold tap water is all that is needed to fight infections but when heated to over 100 degrees Celsius, the water content is reduced to less than 5%. The resulting steam is considered dry. This alternative weapon is ideal in the fight to combat infections and cross contamination's and has been independently and scientifically validated for its bactericidal efficacy!

- The ultimate healthcare steam & vacuum cleaner
- A steam cleaner, a dry vacuum cleaner and a wet vacuum cleaner in one!
- The water filtration system means no vacuum dust bag
- Easy to manoeuvre thanks to the new trolley supplied as standard
- Truly versatile unit for many different environments



Technical Specifications	
Power Supply	230v 50/60 Hz
Maximum Power	3,000 Watt
Steam Pressure	6.5 Bar nominal
Boiler Capacity	2.6 Litres
Boller Material	RVS AISI 304
Vacuum / Vac Tank Capacity	91,15 × 900 cm
Heating Up Time	Approx. 5 minutes
Autonomy	Continuous Operation
Cable lenght	4 metres
Machines Dimension (WDL)	52cm x 37cm x 43cm
Net wieght	14 kg
Certification / Marking	30 kg
Max. Boiler Temperature	154°C
Adjustable Output Regulator	Yes
Indicator for Lack of	Yes

Steam & Vac Pro Accessories (Include with Machine)





Central Connector Hose A00260



Double Lock Extension Tubes* A00982



60mm Nylon Brush
A00264



30mm Nylon Brush
A00806



Detail Nozzle A00260



150 mm Suction Tool A00078



150mm Squeegee Insert A00080



150mm Squeegee Insert A00078



150mm Brush Insert A00079



Detail Gulper Nozzle A00075



Nylon Brush Insert A00267



300mm Squeegee Floor Insert A00266



300mm Carpet Insert A00939



300mm Double Sided Insert (Squeegee & Brush) A00981



Upholstery Spatula A00826



Small Gulper Nozzle A00945



Steam & Vac Pro Trolley A00238



Safety Gloves A00097

Optional Accessories



Wall Steam Mop**
A03160



Adaptor Tool A03163



Floor Mop ** A03159



Upholstery Vacuum Tool A00173



Turbo Brush



Microfibre Cloth for Floor Mop **A03161**



30mm Brass Detail Brush



Safety Goggles A00096



Cleaning in Progress Safety Sign A00972



Large Detail Nozzle
A00070

^{*} Only one supplied when purchased as a stand alone item

^{**} A03163 required with this item



PROVAP EVO VAC M6047 1 Year Warranty



The Provap Evo Vac cleaning system will ensure that your own hygiene and HACCP regulations are not only maintained but exceeded. Utilising dry steam heated to 175°C, germs and grime will be easily and quickly removed. The integral vacuum will clean up the residue while you steam, resulting in an instant touch dry surface, ready for use.

The ProVap Evo Vac features a detergent injection facility to enables the addition of a suitable mild detergent to the dry steam jet for de-greasing. The ProVap Evo Vac have been the subject of independent studies to investigate its cleaning efficiency.

- Independently validated decontamination results
- Achieves consistently high levels of sanitation
- Tackle infection control issues with confidence
- Integrated water filtration vacuum leaves surfaces clean & touch dry
- Optional healthcare specific tools available developed specially for high risk contact areas
- Area Specific Stand Operating Procedures (SOP) available on request



Technical Specifications	
Power Supply	230v 50/60 Hz
Maximum Power	3,000 Wat
Steam Pressure	9.0 Bar nomina
Boiler Capacity	2.7 Litres
Boller Material	RVS AISI 304
Vacuum / Vac Tank Capacity	Max. 1000 W 5.0 Litres
Heating Up Time	Approx. 5 minutes
Autonomy	Continuous Operation
Cable lenght	5 metres
Machines Dimension (WDL)	49 cm x 43 cm x 105cm
Net wieght	36Kg
Shipping Weight	40Kg
Certification/Marking	CE, IPX4
Max. Boiler Temperature	180°C
Adjustable Output Regulator	Yes
Adjustable Output Regulator	Yes



Provap Evo Vac Accessories (Include with Machine)



Central Connector Hose A00983



Double Lock Extension Tubes* A00982



60mm Nylon Brush A00264



30mm Nylon Brush A00806





Detail Nozzle A00943T



150 mm Suction Tool A00078



150mm Squeegee Insert (Fits A00078) 0800A



150mm Squeegee Insert

A00078



150mm Brush Insert A00079



Detail Gulper Nozzle A00075



Nylon Brush Insert A00267



300mm Squeegee Floor Insert A00266



300mm Carpet Insert A00939



300mm Double Sided Insert (Squeegee & Brush) A00981



Upholstery Spatula A00826



Small Gulper Nozzle A00945



Safety Gloves A00097







ENVIRODRI GEN 4

DRY CARPET CLEANING

The Envirodri system is one of the most efficient and environmentally responsible ways to clean all types of carpet without the use of water. To be used in conjunction with Pro 40 Envirodri Microsponges, the dry carpet cleaning machine is suitable for both spot and deep cleaning which enables facilities to maintain their flooring without disruption to daily activities.

The system clean using 100% biodegradable, natural, soft, sponge-like particles which have been moistened with just the right amount of cleaning ingredients to dissolve and absorb dirt and grime from carpet fibres. The GEN4 machine effortlessly glides over carpets, agitating the microsponges into the fibres whilst also acting as a pile lifter - cleaning simultaneously restoring previously flat, crushed carpet. After use, simply vacuum for a cleaner, odour-free and dryer carpet





PRODUCT FEATURES

- Self-propelling, lightweight and easy to use
- Water-free cleaning! Carpets can be walked on during and immediately after use.
- Suitable for both large and small spaces
- Can be used for both spot removal and for deep cleaning of carpets



SIZES

Single machine sold with medium white standard brushes. Leasing options also available. Contact us to find out more.

Other brushes of varying grade of stiffness are also available for very soft or hard carpet types.









PRO 40 ENVIRODRI

MICROSPONGES

Suitable for use on all carpet types, Pro 40 Microsponges is one of the most advanced dry carpet cleaning powders on the market today. Made from 100% biodegradable, natural, soft, sponge-like cellulose fibres these microsponges have been moistened with just the right amount of cleaning ingredients to dissolve and remove dirt and grime from carpet fibres.

Suitable for all types of carpet and both spot removal or deep cleaning, the microsponges should be used in conjunction with the Envirodri GEN 4 Dry Carpet Cleaning Machine or a carpet brush.





PRODUCT FEATURES

- Independently tested and certified by Woolsafe
- Product dissolves and absorbs both oil and water based dirt
- Removes unpleasant odours
- Suitable for all carpet types including wool, sisal and coir
- Suitable for use on raised access flooring
- Carpet can be walked on during and immediately after cleaning
- Leaves no sticky residues
- This dry cleaning method eliminates the risk of shrinkage, watermarks, colour-running and mildew
- 100% biodegradable and environmentally friendly
- Compatible with the HOST dry carpet cleaning machines including the Freestyle, Reliant and Liberator

SIZES

750g of Pro 40 Microsponges will clean approximately 20m2 of medium soiled carpet.

1 × 10Kg Carry Bucket

2 × 10Kg Re-fill Packs

4 × 3Kg Carry Buckets

12 × 750g Pouches

FRAGRANCES

- Green Tea
- Fresh Linen
- Unfragranced









Chemicals & Machines

Cleaning, Care & Protection Products







MONOMATIC LS (LOW SPEED)

For scrubbing, spray cleaning, sanding, shampooing, oiling and basic cleaning of a wide range of floors, with optional accessories.





Technical Data	
Rated voltage	230 V
Frequency	50 Hz
Working width	43 cm
Power cable length	12.5 m
Weight	34 kg
Brush speed	162 rpm
Brush motor output	1,200 W
Torque	55 Nm

Method	
Sanding (wet/dry)	•
Wet scrubbing	•
Dry scrubbing	•
Wet shampooing	•
Carpet-pad method	•
Spray cleaning	•
Oiling	•
Waxing	
Polishing	





MONOMATIC HS (HIGH SPEED)

For spray cleaning, spray polishing and dry polishing a wide variety of floor coverings, accessories optional.

Technical Data	
Rated voltage	230 V
Frequency	50 Hz
Working width	43 cm
Power cable length	12.5 m
Weight	34 kg
Brush speed	400 rpm
Brush motor output	1,500 W
Torque	28.5 Nm

Method	
Sanding (wet/dry)	•
Wet scrubbing	•
Dry scrubbing	•
Wet shampooing	•
Carpet-pad method	•
Spray cleaning	•
Oiling	•
Waxing	
Polishing	





MONOMATIC US (ULTRA SPEED)

For efficient polishing with ultra-speed from medium-sized and large open surfaces.

Technical Data	
Rated voltage	230 V
Frequency	50 Hz
Working width	50 cm
Power cable length	20.5 m
Weight	45 kg
Brush speed	1,100 rpm
Brush motor output	1,800 W
Torque	15.5 Nm

Method	
Sanding (wet/dry)	•
Wet scrubbing	•
Dry scrubbing	•
Wet shampooing	•
Carpet-pad method	•
Spray cleaning	•
Oiling	•
Waxing	
Polishing	



Mod	el	Dimen sions	Selling Unit
2005	1 Monomatic Low Speed (LS)	43 CM	1 PCS
2005	5 Monomatic Duo Speed (DS)	43 CM	1 PCS
2005	7 Monomatic High Speed (HS)	43 CM	1 PCS

Brushe	3	For Model	Selling Unit
21270	Scrubbing brush polypropylene	LS	1 PCS
21285	Scrubbing brush Supernylon	LS	1 PCS
21295	Scrubbing brush exposed aggregate concreted	LS	1 PCS
21300	Scrubbing brush Tynex	LS	1 PCS
21310	Shampoo brush nylon	LS	1 PCS
21315	Shampoo brush nylon hard	LS	1 PCS
21210	Polishing brush Union	HS	1 PCS

Pad Driv	ve Disks	For Model	Selling Unit
21112	Pad drive disk Low Speed	LS	1 PCS
21120	Pad drive High Speed	HS	1 PCS
21126	Pad drive disk HS PUR	HS	1 PCS

Weight		For Model	Selling Unit
21160	Additional weight 1.9 kg	LS	1 PCS
24758	Floorplate 5 kg	LS	1 PCS

Spray C	leaning Accessories	For Model	Selling Unit
24330	Spray unit	LS, HS	1 PCS

Dry scru	ubbing accessories	For Model	Selling Unit
40312	Suction unit	LS, HS	1 PCS
21025	Suction ring	LS	1 PCS
21022	Appliance power	LS, HS	1 PCS



Sanding	J Accessories	For Model	Selling Unit
21350	Abrasive disk wood	LS	1 PCS
22401	Abrasive disk wood no. 16	LS	1 PCS
22409	Abrasive disk wood no. 40	LS	1 PCS
22411	Abrasive disk mesh no. 60	LS	1 PCS
22413	Abrasive disk mesh no. 80	LS	1 PCS
22515	Abrasive disk mesh no. 100	LS	1 PCS
22417	Abrasive disk mesh no. 150	LS	1 PCS

General Accessories		For Model	Selling Unit
24310	Water tank 14 I cpl, white	LS	1 PCS

wetrok







Basic Version	Low Speed (LS) 20051	High Speed (HS) 20057	Ultra Speed (US) 20059
Additional weight 1.9 kg	•		
Floorplate 5 kg			
Appliance power for suction unit		•	

Technical Data			
Rated voltage	230 V		
Frequency	50 Hz		
Working width	43 cm 50 cm		
Power cable length	12.5 m		20.5 m
Weight	34 kg 34 kg		45 kg
Brush speed	162 rpm	162 rpm 400 rpm	
Brush motor output	1,200 W 1500 W		1800 W
Torque	55 Nm	28.5 Nm	15.5 Nm

Method			
Sanding (wet/dry)	230 V		
Wet scrubbing	50 Hz		
Dry scrubbing	43 cm		
Power cable length	12.5 m		12.5 m
Weight	34 kg	35 kg	34 kg
Brush speed	162 rpm	400 rpm	1,100 rpm
Brush motor output	1,200 W	1500 W	1800 W
Torque	55 Nm	28.5 Nm	15.5 Nm





DUOMATIC ESPIRIT

High-perfomance single-brush machine. Available in four differently equipped version: The "industry" model, fitted with a powerful industrial motor for cleaning tasks; the "Low Speed" model, the reliable all rounder for deep and maintenance cleaning; the "Duo Speed", the machine for universal deployment with two speed setting and the "High Speed" model for polishing





Model	Name	Dimensions	Selling Unit
50211	Duomatic Esprit	55 I/50 cm	1 pc
50212	Duomatic Esprit Dosing	55 I/50 cm	1pc.

Batteries	Name	Dimensions	Selling Unit
51316	Battery dry 12 V/76 AH		1 pc
51322	Battery dry 12 V/105 AĤ		1pc.

Pads	Name	Dimensions	Selling Unit
51100	Pad drive disk1)	25.5 cm	1 pc
52306	Poly-Pad red 1pc. = 5 pads 52309 Poly pad blue	25.5 cm	1pc. = 5 pads
52309	Poly pad blue	25.5 cm	1pc. = 5 pads
52307	Poly pad green	25.5 cm	1pc. = 5 pads
52308	Poly pad black	25.5 cm	1pc. = 5 pads
52402	Microsol fibre pad	25.5 cm	1pc. = 5 pads







Brushes	Name	Dimensions	Selling Unit
51245	Scrubbing brush Supernylon ¹⁾	25.5 cm	1 pc
51248	Scrubbing brush soft 1)	25.5 cm	1pc.

Suction lips	Name	Dimensions	Selling Unit
64060	Working lip rear 79 NR		1 pc
64061	Sealing lip front 79 NR		1pc.
52084	Working lip rear 79 PUR 45		1 pc
52085	Sealing lip front 79 NR		1pc.
52086	Working lip rear 79 PUR 45 ribbed		1 pc

Accessories	Name	Dimensions	Selling Unit
51400	Universal fill hose, 3 m		1 pc
64139	Chemicals canister 5 litres		1pc.





DISCOMATIC MAMBO

The new Discomatic Mambo combines cleaning power and endurance with agility hence extremely easy operation. It is the most compact scrubbing vacuum cleaner available with a 30 litre fresh water tank. A compact powerhouse for smaller to medium-sized areas.

The new Discomatic Mambo is the most compact scrubbing vacuum cleaner in its performance category. It is robustly constructed and powerful, yet agile. With its 30 litre fresh water tank and a long-lasting lithium ion battery it is ideally suited for longer periods of cleaning work without any interruptions. The proven double disk brush system ensures excellent cleaning results and supports the forward motion of the machine. The Discomatic Mambo has a water pump that is built in as standard and can be supplied optionally with a automatic dosage system for an optimal mix of fresh water and chemicals.

Model	Name	Dimensions	Selling Unit
50025	Discomatic Mambo with brushes	30 I/43 cm	1 pc
50026	Discomatic Mambo Dosing with brushes	30 I/43 cm	1pc
50028	Discomatic Mambo Dosing with PDD	30 I/43 cm	1pc

Pads	Name	Dimensions	Selling Unit
51100	Pad drive disk 1)	22 cm	1 pc
52301	Poly-Pad red	22 cm	1pc. = 5 pads
52304	Poly pad blue	22 cm	1pc. = 5 pads
52302	Poly pad green	22 cm	1pc. = 5 pads
52303	Poly pad black	22 cm	1pc. = 5 pads
52400	Microsol fibre pad	22 cm	1pc. = 5 pads

Brushes	Name	Dimensions	Selling Unit
51240	Scrubbing brush Supernylon 1)	22 cm	1 pc
51244	Scrubbing brush soft 1)	22 cm	1pc.

Accessories	Name	Dimensions	Selling Unit
51400	Universal fill hose, 3 m		1 pc
69254	Splash guard (recommended for use with pads)		1pc.
62684	Chemicals canister with screw-on lid		1pc.
65132	Silent kit		1pc.





DRIVEMATIC DELIGHT

Drivematic Delight thoroughly cleans large areas even faster. Its compact dimensions and small turning radius ensures highest operating flexibility - even in elevators and checkout areas. The ergonomic seat allows your staff to get going right away - no complicated seat settings required.

Model	Name	Dimensions	Selling Unit
50092	Drivematic Delight	70 I/66 cm	1 pc
50093	Drivematic Delight Silent	70 I/66 cm	1pc
50094	Drivematic Delight SL	70 I/66 cm	1pc
50095	Drivematic Delight Silent SL	70 I/66 cm	1pc
50096	Drivematic Delight Dosing	70 I/66 cm	1pc
50097	Drivematic Delight Dosing Silent	70 I/66 cm	1pc
50098	Drivematic Delight Dosing SL	70 I/66 cm	1pc
50099	Drivematic Delight Dosing Silent SL	70 I/66 cm	1pc

Batteries	Name	Dimensions	Selling Unit
51322	Battery dry 12 V/105 Ah ¹⁾		1 pc
51341	Battery dry 6 V/180 Ah ¹⁾		1pc.

Pads	Name	Dimensions	Selling Unit
65061	Pad drive disk	33 cm	1 pc
52321	Poly-Pad red	33 cm	1pc = 5 pads
52324	Poly pad blue	33 cm	1pc = 5 pads
52322	Poly pad green	33 cm	1pc = 5 pads
52322	Poly pad black	33 cm	1pc = 5 pads
52404	Microsol fibre pad	33 cm	1pc = 5 pads











Brushes	Name	Dimensions	Selling Unit
65058	Scrubbing brusil polypropylene	22.5 cm	1 pc
65059	Scrubbing brush soft	22.5 cm	1pc.

Suction lips	Name	Dimensions	Selling Unit
65002	Suction lip set NR		1 pair
65053	Suction lip set PUR		1 pair

Suction lips	Name	Dimensions	Selling Unit
65002	Suction lip set NR		1 pair
65053	Suction lip set PUR		1 pair

Suction lips	Name	Dimensions	Selling Unit
51400	Universal fill hose, 3 m		1 pc
65062	Replacement chemicals tank8 It		1 pc

Drivematic Delight

Model	Standard	Silent	SL	Silent SL
Article Number	50092	50093	50094	50351

Basic Version
Internal charger
Eletric drive system
Quick-Refill system
Brush housing complete
Suction nozzle complete
Suction lip set NR
Dosage system complete

Optional Extras			
Silent Kit	•		
Safety light (SL)		•	

Drivematic Delight Dosing

Standard	Silent	SL	Silent SL
50092	50093	50094	50351

•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•

•		•
	•	•

Marie Mari	Technical data	
Trata landph Total width Sutton width Sutton width Total height Weight forct butterior Recovery tank Recovery tank Remote of brouber Brouh motion origin Brouh motion Brouh mo	Theoretical area perf.	3,960m²/h
Total width Soction width Socient Socien	Working width	68 cm
Section width 85 cm Total height 117 cm Weight finit batteries) 386 kg Feeb water tank 70 l Recovery tank 70 l Brush personer 2 pcs Brush personer 30 kg (0.28 N/cm²) Brush personer 180 rpm Brush motor output 500 W Abrituw state 32 l/s Forward speed 0-7 km/h Reversity speed 0-2.5 km/h Bettery capacity 105/180 Ah Section tubins output 460 W Otive type Drive motor Max gradability 1,690 W Otive type 750 W Bottle restered 63/59 dB(A)	Total length	138 cm
total bright 117 cm weight fried. batter tank 386 kg Feeb watter tank 70 l Recovery tank 70 l Bromber of brushess 2 pcs Brush persone 30 kg 0.28 N/cm²) Brush presone 500 W Brush more ordyn 500 W Altribur state 32 l/s Forward opeed 0-7 km/h Receiving speed 0-2.5 km/h Battery capacity 460 W Drive rype Drive motor Max. gradability 12% Total ordynt 15,650 W Drive system output 750 W Bolical level 63/59 dB(A)	Total width	68 cm
Weight (incl. batteries) 386 kg Fresh water tank 701 Recovery tank 701 Number of brushes 2 pc5 Brush peed 30kg (0.28 N/cm²) Brush peed 180 Peer output Airflow rate 500 W Airflow rate 32 U/s Fereural speed 0-7 km/h Revestig speed 0-7 km/h Bettery capacity 460 W Swetten turbino output 460 W Total output 12% Total output 1,690 W Drive system output 63/59 dB(A)	Suction width	85 cm
Fresh water tank 70 I Recovery tank 70 I Number of brushes 2 pcs Brush pressure 30 kg (0.28 N/cm²) Brush speed 180 rpm Brush motor output 500 W Airflow rate 32 l/s Fereurid speed 0-7 km/h Reversing speed 0-2.5 km/h Sattery capacity 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Brites wytern output 63/59 dB(A)	Total height	117 cm
Recovery tank 70 I Number of brushnes 2 pcs Brush pressure 30 kg (0.28 N/cm²) Brush pressure 180 rpm Brush motor output 500 W Vacuum 1 (10 mbar Airflow rate 32 l/s Porward speed 0 -7 km/h Recersing speed 0 -7 km/h Section turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 63/59 dB(A)	Weight (incl. batteries)	386 kg
Number of brushes Rush pressure 30 kg (0.28 N/cm ²) Brush pressure 30 kg (0.28 N/cm ²) Brush motor output 500 W Vacuum 110 mbar Airflow rate 32 l/s Forward speed 0-7 km/h Reversing speed 0-2.5 km/h Battery capacity 105/180 Ah Suttion turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1690 W Drive spetem output 1690 W D	Fresh water tank	701
Brush speed 30 kg (0.28 N/cm²) Brush speed 180 rpm Brush moter output 500 W Vacuum 110 mbar Airflow rate 32 l/s Forward speed 0-7 km/h Bettery capacitry 0-2.5 km/h Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Recovery tank	701
Brush speed 180 rpm Brush motor output 500 W Vacuum 110 mbar Airflow rate 32 l/s Forward speed 0-7 km/h Reversing speed 0-2.5 km/h Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Number of brushes	2 pcs
Brush motor output 500 W Vacuum 110 mbar Airflow rate 32 l/s Forward speed 0-7 km/h Reversing speed 0-2.5 km/h Battery capacity 105/180 Ah Suction turbine output 460 W Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Brush pressure	30 kg (0.28 N/cm ²)
Vacuum 110 mbar Airflow rate 32 l/s Forward speed 0-7 km/h Reversing speed 0-2.5 km/h Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Brush speed	180 rpm
Airflow rate Forward speed Reversing speed Battery capacity Drive type Total output Total output Noise level Noise level	Brush motor output	500 W
Forward speed 0-7 km/h Reversing speed 0-2.5 km/h Battery capacity 105/180 Ah Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Vacuum	110 mbar
Reversing speed 0-2.5 km/h Battery capacity 105/180 Ah Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Airflow rate	32 l/s
Battery capacity Suction turbine output Drive type Max. gradability Total output Orive system output Noise level	Forward speed	0-7 km/h
Suction turbine output 460 W Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Reversing speed	0-2.5 km/h
Drive type Drive motor Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Battery capacity	105/180 Ah
Max. gradability 12% Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Suction turbine output	460 W
Total output 1,690 W Drive system output 750 W Noise level 63/59 dB(A)	Drive type	Drive motor
Drive system output 750 W Noise level 63/59 dB(A)	Max. gradability	12%
Noise level 63/59 dB(A)	Total output	1,690 W
	Drive system output	750 W
Dosage 0.5-5.0%	Noise level	63/59 dB(A)
	Dosage	0.5-5.0%

Battery	
Battery life 105 Ah	up to 2.4 h
Battery life 180 Ah	up to 3.5 h



WETCO SURF

All purpose cleaner - maintenance cleaner













Cleaning by hand

Wet mopping

Foaming by hand (foamer dispenser)

Surfaces, furniture

Application

- Versatile, alcohol-based all purpose cleaner
- For maintenance cleaning of alcohol-resistant washable surface and floor covering
- Certified environmentally friendly maintenance cleaner (Nordic Ecolabel)

PH value

7.5 - 8.5

Foam

High foaming

Please Note

Use a max dosage 1% for polymer- coated floors

Properties

- Dries quickly without leaving streaks
- High foaming
- pH neutral
- Lightly perfumed

WETCO FLOOR

Floor cleaner - maintenance cleaner















Nordic Swan

Application

- Versatile maintenance cleaner
- For maintanance cleaning of washable and alkali-resistant surfaces/floor coverings (PVC, natural and artificial stone, clinker asphalt, linoleum, natural rubber, etc.)
- Certified environmentally friendly maintenance celaner (Nordic Ecolabel)

Properties

- Low foaming
- Slightly alkaline
- Non-perfumed.

PH value

9.5-10.5

Foam

Suitable for machine use / low foam

Please Note

Not suitable for maintenance cleaning of non- sealed wooden flooring.



WETCO SAN

Sanitary cleaner - maintenance cleaner











Nordic Swan

Application

Sanitary maintenance cleaning for removing

For maintenance cleaning of washable and acid-resistant surfaces/fittings (sanitary porcelain, fittings, ceramic tiles, bathroom, showers, washroom and WCs, etc.)

Certified environmentally friendly maintenance cleaner (Nordic Ecolabel)

PH value

0.5-1.5

Foam

High foaming

Properties

- High foaming.
- Highly acidic.
- Red in colour.
- Non-perfumed

Please Note

Not suitable for acid-sensitive surfaces (lime stone, marble, clinker, aluminium, etc.)

MEPOL H

Flooring protection - coating





Application

- High-shine protective treatment
- For treating hard and elastic floor coverings (PVC, linoleum, natural and artificial stone, etc.)

Properties

- Polymer/wax-based
- High-shine
- Water vapour diffusion guaranteed

PH value

8-9

Foam

Please Note

- Shake well before use
- Not suitable for outdoors, wet zones.
- Treat porous floor coverings with Porosol before use

- Forms a polishable, water-resistant protective film

Undiluted





REMAT

Floor cleaner - basic & industrial cleaners











Cleaning by hand

pniago

Foaming by hand (foamer dispenser)

ning by hand Surfaces, furnit

Nordic

Application

- High performance stripper
- For removal of polymer and wax coatings
- For chemical cleaning of washable and alkali-resistant floor coverings (PVC, natural and artificial stone, clinker,

PH value

12.5-13.5

Foam


Suitable for machine use/low foam

Properties

- Low foaming
- Contains solvents
- Highly alkaline
- Lightly perfumed

Please Note

Not suitable for linoleum, natural rubber wooden flooring, asphalt, painted surfaces.

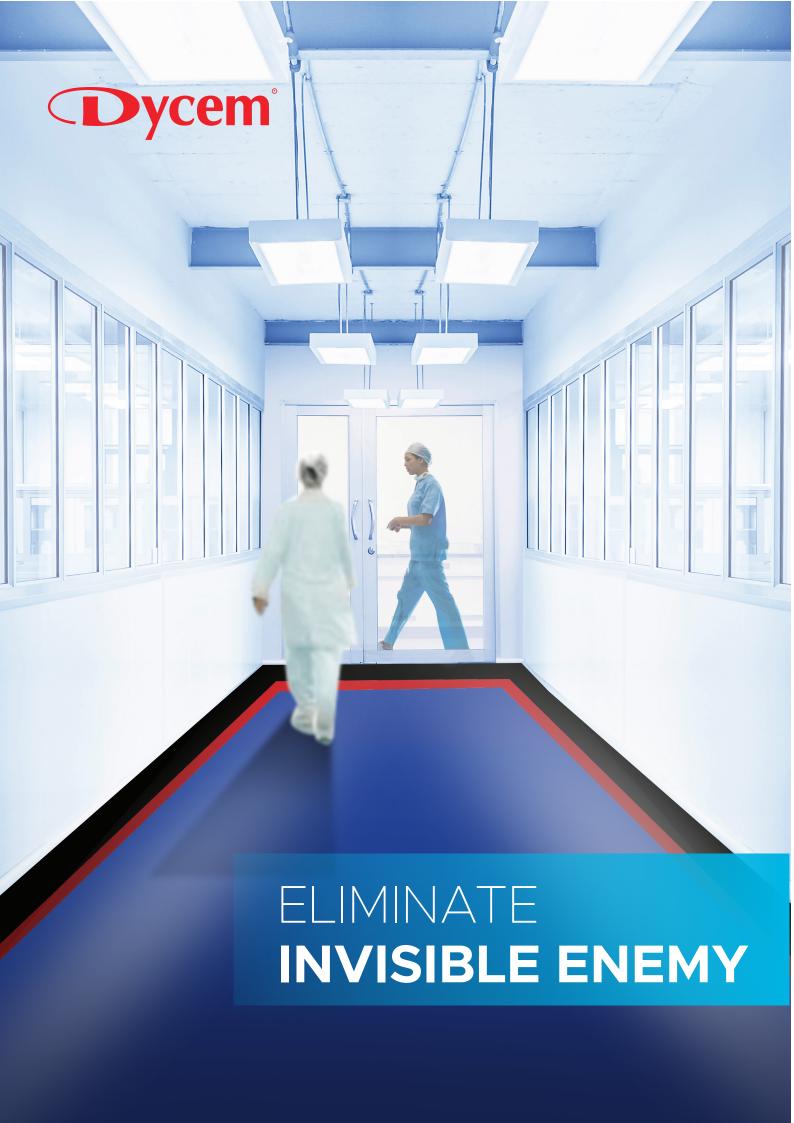





CLEAN ZONE (CZO1) 1 Year Warranty

FOR PEDESTRIAN AND LIGHT WHEELED TRAFFIC UP TO 1000LBS/PSI

Prevents up t o 99.9% of contamination from entering critical areas



Suitable for traffic up to 1000lbs / psi



12 month warranty

ABOUT

CZ01 is a high perfomance contamination control zone suitable for light wheeled traffic and heavier pedestrian flows. Permanently installed, it is the most effective way of controlling all form of foot, wheel and air borne contamination. Dycem CleanZone is available in a range of attractive designs which means it still looks good between wet cleaning.

OPTIONS

CZ01 has the flexibility to be installed into a variety of different sized and shaped areas, it is accompanied by a number of edging sytem choices that will be illustrated in this brochure and can be demonstrated by our contamination control specialists


WHERE TO USE CLEANZONE

- In hallways to prevent cross contamination
- Inside the critical area adjacent to critical products and process
- Inside airlocks, gowning rooms, and air showers to control and retain
- All pedestrian "Exit Area" to prevent contamination
- All pedestrian "Entrances" to critical areas to prevent ingress of contamination





PRODUCT OPTIONS AVAILABLE

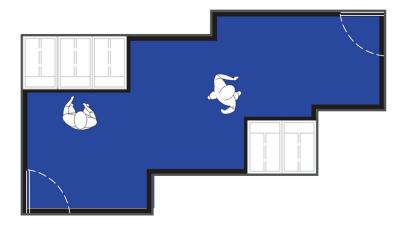

CUSTOM PRODUCT OPTION

- Suitable for areas that are complex in shape and construction
- Ideal for inlaid or wall-to-wall flooring installations
- Ideal for facilities that require multiple installations at any one time
- Available with a range of edging options that helps tailor Dycem to your individual needs
- Expected life cycle efficiency (if maintained correctly as per manufacturer's instructions) for 3-5 years
- Standard 12 month product warranty offered from date of installation

- Simple centred solution
- Dirty / Clean side two tone options
- IdeAl for Airlocks, Air showers and step over benches
- Perfect for CNC to ISO 4+

BENEFITS

- Prevents over 99% of contamination from entering your critical area
- It effectively attracts, collects and retains contamination from the wheels of forklifts, pallet trucks, large trolley and carts
- Large sizes available to ensure maximum decontamination of wheels
- Flame retardant option available
- Comes with two complete different edging options: heavy duty aluminium edging or a lower profile stainless steel option
- Coving and inlaid options available
- Periodic replacement or service contract available
- Masking available to hide contamination once on Dycem

CZ01 COLOURS

















WORK ZONE (CZ02)

1 Year Warranty

FOR LARGE TROLLEY, PALLET TRUCKS AND FORK LIFTS

99.9%

Prevents up t o 99.9% of contamination from entering critical areas







12 month warranty

ABOUT

CZ02 has been specially designed to remove contamination from areas subject to heavy wheeled traffic. If effectively attracts, collects and retains contamination from the wheel of forklifts, pallet trucks, large trolleys and carts, preventing partices and microbes from getting into your critical areas.


OPTIONS

CZ02 has the flexibility to be installed into in a variety of heavy duty areas, it is accompanied by either a heavy duty aluminium or low profile food grade stainless steel option. These are illustrated in this brochure and can be demonstrated by our contamination control specialists


WHERE TO USE WORKZONE

- In hallways to prevent cross contamination
- All material exits to prevent contamination leaving the critical area
- Inside airlocks, warehouses, and product transfer areas to control and retain contamination
- In hallways to prevent cross contamination
- Inside the critical area adjacent to critical products and processes





PRODUCT OPTIONS AVAILABLE

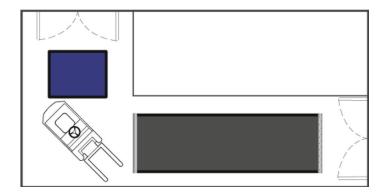

CUSTOM PRODUCT OPTION

- Suitable for areas that are complex in shape and construction
- Ideal for complex inlaid or wall-to-wall flooring installations
- Ideal for facilities that require multiple installations at any one time
- Available with a range of edging options that helps tailor Dycem to your individual needs
- Expected lifecycle efficiency (if maintained correctly as per manufacturer's instructions) for 3-5 years
- Standard 12 month product warranty offered from date of installation

- Centered solution
- Ideal for heavy duty zones
- Ideal for facilities that require multiple installations at any one time
- Material Airlocks, Primary Packaging and Goods/ Warehouse
- Can be fitted into CNC ISO 4+

BENEFITS

- Prevents over 99.9% of contamination from entering your critical area
- Reduced floor and air particle / microbial counts
- Improved yield, cost savings and profit ability
- Reduced risk of high product rejection rates
- Dycem products cannot be bypassed and require no overt action
- Available in a range of low profile edging systems
- Flame retardent option available
- Coving and inlaid optios available

CZ02 COLOURS















SHINE







FLORAL DISINFECTANT

A readily biodegradable amphoteric disinfectant with a pleasant floral bouquet. Suitable for areas where a high standard of hygiene is required, such as washrooms, toilets, showers, drains & dustbins

Specification	
Coverage	750m 2 of floor if used at 1:30 for single solution mopping.
Case	1 × 20 litre

Detail

- Suitable for areas where a high standard of hygiene is required, such as washrooms, toilets, showers, drains and dustbins
- The pH of the concentrate under typical analysis is 8.0.
- 1 × 5 litre container of Floral Disinfectant is sufficient to cover approximately 750m2 of floor if used at 1:30 for single solution mopping.



SCREEN POWERFUL DISINFECTANT

Powerful disinfectant, for the ultimate hygiene clean. Concentrated disinfectant cleaner with powerful virucidal, bactericidal and fungicidal properties. Deactivates MRSA, HIV, Hepatitis B, Legionella and Athletes Foot. Use for damp mopping, damp wiping, spray cleaning and deep cleaning applications. Also suitable for clinical cleaning and disinfection.

Specification			
Code	P06068		
Size	2 × 5 litre		

Detail

- Effective againts MRSA, HIV, Hepatitis B, Legionella & Athlete's Foot
- BS EN 1276 accredited





SAVONA D2

10% active, neutral general purpose detergent. Rapidly cuts through grease, fat and food residue. General purpose detergent for hand dishwashing. Also suitable for general purpose cleaning of surfaces, walls and floors.

Specification		
Code	P12025	
Size	1 × 20 litre	

Detail

- · For hand dishwashing
- · Rapidly removes grease
- Does not require rinsing
- Readily biodegrable
- Economical
- · Long lasting foam wiht no residual scum
- Mild & gentle to the skin
- · For general cleaning of all hard floors
- Also for windows, paintwork, walls & hard surfaces



SPRING CLEAN

Revitalize Washrooms with Springclean Washroom Cleaner, a versatile, potent formula. This concentrated, anti-bacterial cleaner is perfect for robust surfaces, especially in hygiene-sensitive areas. Infused with natural orange oil, it efficiently removes body fat and soap scum, adhering well to vertical surfaces. Ideal for washrooms, it also excels on various surfaces, such as plastic, enamel, laminate, ceramic, stainless steel, chrome, glass, and painted surfaces. Effortlessly eliminating grime, it leaves a refreshing citrus finish

Specification	
Code	P06076
Size	2 × 5 litre

Detail

- This concentrated, anti-bacterial multi-purpose cleaner can be used on a range of hard surfaces; especially in washroom, bathroom and toilet areas where hygiene is paramount
- this component also makes a highly effective body fat and soap scum remover whilst its viscous properties provide excellent cling to vertical surfaces.





CLEAN & BUFF FLOOR MAINTAINER

Clean & Buff is a high quality floor maintainer for routine spray buffing, mopping and scrubber drying of hard floors particularly those treated with an emulsion polish. Its specialised blend of detergent and slip-resistant wax make it a versatile floor maintainer. It cleans, polishes, and deodorises in one quick and easy application, helping to extend the life of your floor. Clean & Buff not only enhances gloss but maintains the quality of your finish and enhances the non slip properties of the polish.

Specification				
Code	P01031			
Size	2 × 5 litre			



CS8 CARPET SHAMPOO

A high quality dry foam carpet shampoo, with fungicidal qualities, high foam cleaning power and a good resistance to re-soiling. CS8 has been formulated for cleaning all carpets using the conventional dry foam shampooing method with a standard speed rotary machine, shampoo brush and solution tank. It may also be used for hand cleaning textile upholstery.

Specification	
Code	08004
Size	2 × 5 litre

Detail

- For the deepest of deep carpet cleans
- High quality dry foam carpet shampoo
- Also suitable for bonnet mopping, pre-spraying & stain removal





CACHAN LUXURY HAND WASH

A high quality, delicately perfumed cosmetic grade liquid handwash for use through soap dispensers. It contains a blend of finest grade synthetic cleansers and moisturiser giving a mild, cleansing action maintaining skin softness

Specification			
Code	08265		
Size	2 × 5 litre		

Detail

- · Soft and gently cleansed hands & skin
- Clean & moisturises
- Produces a rich luxurious lather



PUMAN HSD HIGH STRENGTH DEGREASER

Powerful anti-bacterial alkaline cleaner and degreaser that will cut through even the most substantial build-up of oil and grease. Kills 99.99% bacteria, including E. coli, S. aureus & E. hirae

Specification		
Code	08265	
Size	2 × 5 litre	





M10 MULTI-PURPOSE CLEANER

Clean & Buff is a high quality floor maintainer for routine spray buffing, mopping and scrubber drying of hard floors particularly those treated with an emulsion polish. Its specialised blend of detergent and slip-resistant wax make it a versatile floor maintainer. It cleans, polishes, and deodorises in one quick and easy application, helping to extend the life of your floor. Clean & Buff not only enhances gloss but maintains the quality of your finish and enhances the non slip properties of the polish.

Specification		
Code	P01031	
Size	1 × 20 litre	

Detail

- For use on a wide variety of hard surfaces and floors
- Highly effective alkaline cleaner / degreaser



COUNTRY FRESH

A spray liquid air freshener ideal for $\,$ counteracting cooking, toilet and other unpleasant odors

Specification			
Code	08041		
Size	1 × 20 litre		



TABLETS









GERMISEP 2.5 GRAM (100 TABLETS)

Chlorine is a widely used water disinfectant to sanitize and helps in killing most viruses and bacteria in water. The slow-dissolving nature of the tablet reduces the risk of chlorine overdosage and thereby making it a perfect choice for sanitizing the pools. The chlorine tablets are active agents in killing pathogens that can result in illnesses.

Usage	Chlorine (PPM)	1 Tablet	Method
Spillage of blood	10 000	100 ml	Flood & wipe (allow 2 minutes of contact time before wipe)
General Disinfection	1000	1litres	Wipe
WC's, drains, sinks	400	3.75 litres	Pour in solution at quite periods
Food preparation surface	200	7.5 litres	Clean surface thoroughly. Wet surfaces thoroughly with GERMISEP solution. Stand for 3 minutes. Air dry
Walls, Floors	200	7.5 litres	or use disposable paper towels to wipe dry, which ever appropriate.
Glassware	100	15 litres	Clean glassware before soak in GERMISEP solution for at least 30 minutes. Drain and let it air dry.
Mops and cloths	100	15 litres	Soak for 30 minutes. Do not leave to soak overnight.



PREMSEP 2.5 GRAM (100 TABLETS)

A general purpose versatile sanitiser for deodorising and disfecting toilets, floor, walls, work surfaces, cutlery, cloth and mops. Premsep disinfectant tablets release a powerful disinfectant that will kill all Gram +ve and Gram-ve bacteria, viruses and spores. Each tablet release a minimum 1000 parts per million chlorine per litre of water even after prolonged storage

Usage	Chlorine (PPM)	1 Tablet	Method
Blood & Urine Spillage	10 000	100 ml	Ventilated room. Minimum 2 minutes contact time with solution.
General Disinfection	1000	1litres	Allow 15 minutes contact time
WC's, drains, sinks	400	2.5 litres	Pour in solution at quite periods
Food preparation surface	200	7.5 litres	Clean surface thoroughly before using solution. Wet thoroughly for 3 minutes. Air dry or use
Walls, Floors	200	7.5 litres	disposable paper towels. As above
Glassware	100	10 litres	After cleaning, soak glasses and allow to air dry
Mops and cloths	100	10 litres	Soak for 30 minutes. Do not leave to soak overnight.

OTHERS





Sinar Global Hygiene Nitrile Industrial Powder-free Gloves

- Industrial grade
- · Powder-free gloves
- Available in size S, M, L & XL





Spillage Kit

2 pcs disposable gloves 156g sterisorb powder 1 biohazard yellow waste bag 1 hospicare 70 alcohol wipes 2 pcs c-fold tissue 1 pc scoop 1 pc green tie

WHAT ARE THE MAIN TYPES OF SPILLAGE FOUND IN HOSPITALS?

- Chemical
- Chemotherapy
- Body fluid
- Blood
- Urine & vomit
- Biohazard



CENTRE PULL TOWELS

The large roll accommodates high-traffic environments, while the pull-down dispensing method ensures that each paper towel remains clean and unused until it is dispensed by each customer or employee.



HAND ROLL TOWELS

Toilet paper, sometimes called toilet tissue in Britain, is a tissue paper product primarily used to clean the anus and surrounding area of fecal material after defecation and to clean the perineal area of urine after urination or other bodily fluid releases.



FACIAL TISSUES

The terms are commonly used to refer to the type of paper tissue, usually sold in boxes, that is designed to facilitate the expulsion of nasal mucus from the nose (nose-blowing) although it may refer to other types offacial tissues such as napkins and wipes.



NAPKINS

The term is commonly used to refer to the type of facial tissue, usually sold in boxes, that is designed to facilitate the expulsion of nasal mucus although it may refer to other types of facial tissues including napkins and wipes.



INTERFOLD TOWEL

Interfold Hand Towels. Blue or white hand towels for drying hands in both kitchen and washrooms. Interfold to reduce wastage. Fits small or large hand toweldispenser.



HYGIENE BATHROOM TISSUE

Bathroom tissue, paper towels, facial tissue, paper handkerchiefs and table napkins all play a critical role in hygiene, cleanliness and comfort. Tissue paperproducts function marvelously to promote hygiene by helping to prevent the spread of germs, bacteria, viruses and disease.



JUMBO ROLLS

Jumbo roll tissue is designed to minimize maintenance, since the big rolls help keep even busy bathrooms running smoothly.

These large toilet paper rolls are compatible with high-capacity side-by-side dispensers



TOILET TISSUESToilet paper, sometimes called toilet tissue in Britain, is a tissue paper product primarily used to clean the anus and surrounding aarea of fecal material after defecation and to clean the perineal area of urine after urination or other bodily fluid releases.



HOSPITAL BED SHEETS

The purpose of a fitted bottom sheet is to keep it from slipping off the mattress while the bed is in use. A particular way of folding and tucking while making the bed, known as "hospital corners," is sometimes used when the bottom sheet is flat rather than fitted.





Contact Us

Phone: +603-6187 6866 Whatsapp: +6011-11077535

Email: : enquiry@sghygiene.com.my

1-23A , First Floor, Sky Awani Commercial, Jalan Sentul Pasar, Sentul Pasar, 51100 Kuala Lumpur, Malaysia

